

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



10/524401

(43) International Publication Date
26 February 2004 (26.02.2004)

PCT

(10) International Publication Number
WO 2004/017674 A1

(51) International Patent Classification⁷: H04R 9/06

(21) International Application Number:
PCT/IB2003/003402

(22) International Filing Date: 31 July 2003 (31.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
02078392.4 16 August 2002 (16.08.2002) EP

(71) Applicant (for all designated States except US): KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): BAETEN, Jozef, A., F. [BE/BE]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(74) Agent: SCHRIJNEMAEEKERS, Hubert, J., M.; Philips Intellectual Property & Standards, Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG,

[Continued on next page]

(54) Title: LOUDSPEAKER WITH INVERTED CONE

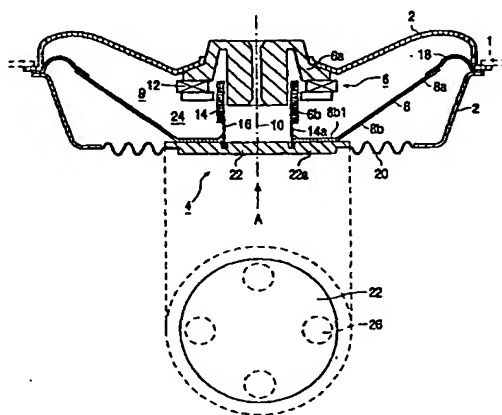

(57) Abstract: An electrodynamic loudspeaker comprising a chassis (2), a movable body (4) flexibly connected to the chassis and having a three-dimensional diaphragm (8) with a base part (8b) and a top part (8a) which is wider than the base part, and an electromagnetic actuator (6) for moving said body with respect to the chassis along a translation axis (10) extending between said two parts of the diaphragm. The actuator comprises a stationary actuator part (6a) secured to the chassis and a translatable actuator part (6b), which substantially extends inside the space (9) enveloped by the contours of the diaphragm and which is translatable along the translation axis with respect to the stationary actuator part and is connected to the movable body in the region of the base part of the diaphragm. The actuator parts are capable of magnetically co-operating with each other across an air gap (16). In order to obtain a small building-in depth, the movable body comprises, in the proximity of the base plate of the diaphragm, a bridging element (22) secured to the movable part of the actuator. This element extends radially with respect to the translation axis, and the diaphragm and the bridging element are interconnected at a radial distance to the translatable part of the actuator.